

# AV1000 2-port Gigabit Passthrough Powerline Adapter

Extend Reliable Gigabit Network Using Existing Electrical Wiring










# Highlights


#### Plug and Play

Powerline adapters and extenders must be deployed in a set of two or more, and be connected to the same electrical circuit.

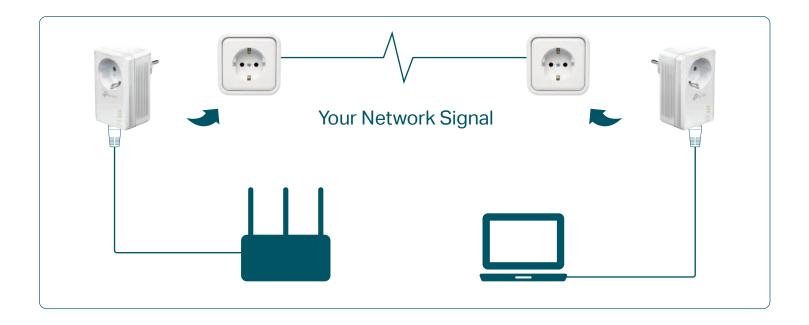

#### Compact Design

The ultra-compact design allows the adapter to be plugged into socket without blocking other sockets.

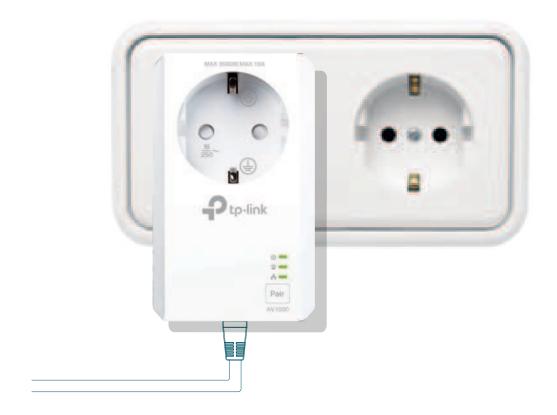


# Highlights

#### Get Reliable Gigabit Network from Any Outlet


The AV1000 2-Port Gigabit Passthrough Powerline Starter Kit brings internet to any area with a power outlet using your home's electrical wiring.<sup>†</sup>

- No need for new wires or drilling
- Network passes through walls and floors

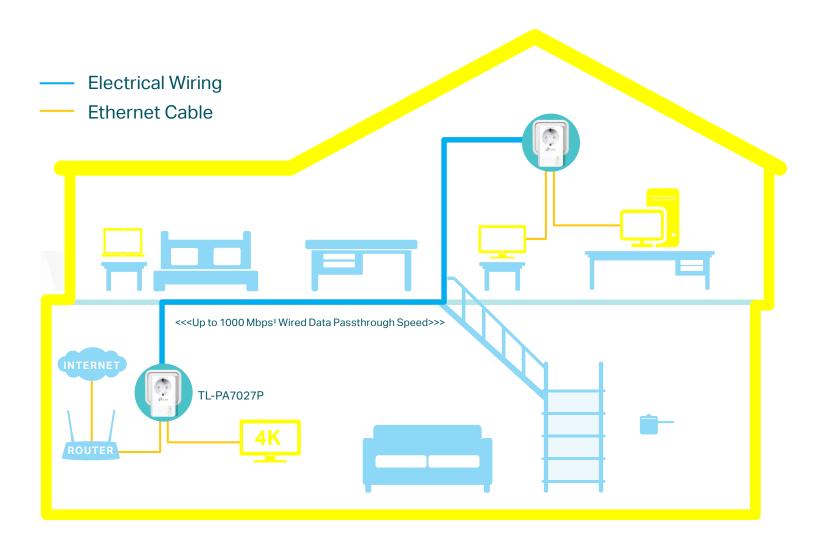

#### Gigabit Ethernet for Fast Connections

The Gigabit Ethernet port provides reliable high-speed wired connections for game consoles, smart TVs, STB and more.

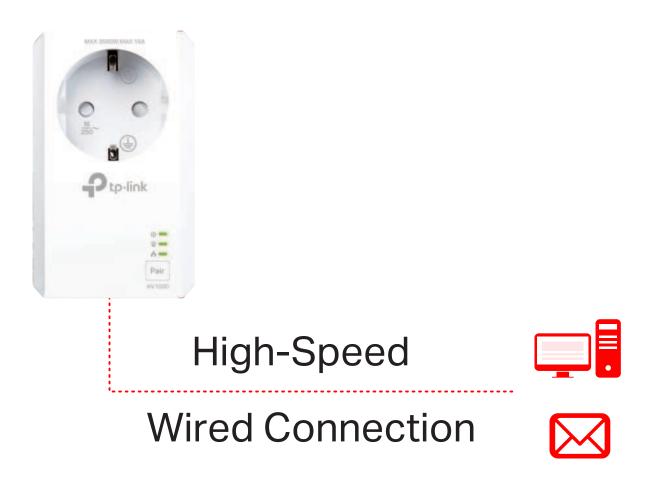

#### **Features**



#### Speed

- Ultra-fast Powerline Speed HomePlug AV2 standard compliant, high-speed data transfer rate of up to 1000 Mbps, ideal for Ultra HD streaming and online gaming
- Gigabit Ethernet Port Provides warp-speed wired connection for 4K HD video streaming, lag-free gaming and more.



#### Range

 300-meter Range – Up to 300 meters/1,000 feet over existing electrical wiring<sup>†</sup>



## Reliability

 Mains Filter – Mains Filter inside the outlet reduces electrical noise interference and improves powerline communication performance



- $\cdot\,$  Plug and Play Plug and play, no configuration required
- No New Wires No new wires, use existing electrical wiring to expand your home network
- Keep Your Outlet An integrated socket lets you power regular devices as normal, and a built-in noise filter prevents them from interrupting the powerline signal.
- TP-Link tpPLC Allows you to easily manage your network using the tpPLC Utility



## Security

 Pair Button – 128-bit AES encryption easily at a push of "Pair" button




## **Energy Saving**

 Power Saving – Power Saving Mode helps reducing power consumption by up to 85%§

## Specifications

#### Hardware

- · Plug Type: EU
- · Standards and Protocols: HomePlug AV2.1, HomePlug AV1,IEEE 1901,IEEE 802.3, IEEE 802.3u
- · Power Consumption: Maximum: 4W, Standby: 0.84W
- · Compatibility: Compatible with all HomePlug AV & HomePlug AV2 standard Powerline adapters<sup>†</sup>
- · Coverage: Connects more devices by adding more adapters or connecting an access point or a switch
- Range: 300 meters/1,000 feet over electrical circuit
- · Interface: Two Gigabit Ethernet Port, Power Socket
- · Button: Pair Button
- · LED Indicator: Power, Powerline, Ethernet
- Dimensions (W x D x H):  $2.3 \times 1.7 \times 3.7$  in ( $58 \times 42 \times 95$  mm)





For more information, please visit

https://www.tp-link.com/en/home-networking/powerline/tl-pa7027p-kit/

■ → T to or scan the QR code left Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks of their respective holders. Copyright ©2020 TP-Link Technologies Co., Ltd. All rights reserved. †Compatible with all HomePlug AV and AV2 Standard Powerline adapters. This product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or are non-standard or outdated.

\* Maximum Powerline signal rates are the physical rates derived from HomePlug AV/AV2 specifications. Actual Powerline and environmental factors, including electrical interference, volume of traffic and network overhead, AFCI circuit breaker, and Powerline being in a separate circuit.

§Actual power saving data will vary because of the network conditions and environment factors.

#### Software

- · Modulation Technology: OFDM (PLC)
- · Powerline Security: 128-bit AES Encryption

#### **Others**

- · Certification: CE, RoHS
- · Package Contents:

AV1000 2-port Gigabit Passthrough Powerline Adapter

2 × TL-PA7027P

2 × Ethernet Cable

Quick Installation Guide

· System Requirements:

Windows 10/8.1/8/7/Vista/XP, Mac OS, Linux

· System Requirements for tpPLC Utility:

Windows XP/Vista/7/8/8.1/10 and Mac OS X (10.7 or later)

· Environment:

Operating Temperature: 0°C~40°C (32°F~104°F) Operating Humidity: 10%~90% non-condensing